


Features

- Inexpensive cost
- Light-weight white opaque substrate for front-lit display
- Light weight makes installation easier
- Matte & Glossy surface available
- Best suited for short-term front-lit displays (indoor/ outdoor)

Applications

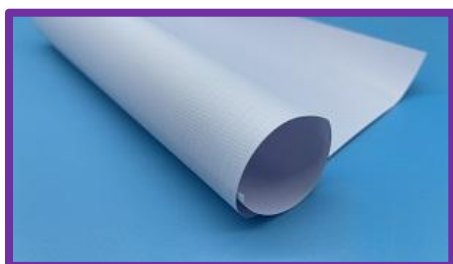

Technical Data Sheet

Item Code	FBLFFX2301812340P	Test Method	
Base Fabric	200D*300D 18*12	DIN EN ISO2060	
Weight (GSM)	340	DIN EN ISO2286-2	
Tensile Strength	Warp (N/5cm)	550	ISO527/3:1995
	Weft (N/5cm)	500	ISO527/3:1995
Tear Strength	Warp (N/5cm)	60	ISO4674/1:2003
	Weft (N/5cm)	40	ISO4674/1:2003
Adhesion Strength	N/A	DIN53357:1982	
Temperature	-30°C/+70°C	ISO13934-1:1999	
RF Weldable (Heat Sealable)	YES	DIN53354	
Flame Retardant	B1/M1/M2/NFPA701		

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

Ink Printability

SOLVENT

ECO-SOLVENT

UV

LATEX

SCREEN PRINTING



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat/WhatsApp: +86-15858322153
<mailto:contact@hncomax.com> <https://www.hncomax.com>

